

DIN60W series

60W Din Rail Power Supply



■ Features:

- Constant voltage design
- European AC input range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Isolation class II
- Can be installed on DIN Rail TS-35/7 or 15



ELECTRICAL SPECIFICATION

MODEL	DIN60W12	DIN60W24
Rated Voltage	12V	24V
Rated Current	5A	2.5A
Current Range	0 ÷ 5A	0 ÷ 2.5A
Rated Power	60W	60W
No Output Voltage (max.)	12.6V	16V
Voltage Adjustment Range [6]	10.7 – 13.5V	23 – 26V
Line Regulation	± 1%	
Load Regulation	± 2%	
Voltage Tolerance [3]	± 5%	
Ripple & Noise (max.) [2]	240mV _{p-p}	320mV _{p-p}
Setup, Rise Time [4]	500ms, 60ms / 230VAC at full load	
Hold up Time (typ., at full load)	40ms / 230VAC	50ms / 230VAC

INPUT

Voltage Range	180 ÷ 264VAC					
Frequency Range	47 ÷ 63Hz					
Power Factor (typ.)	PF > 0.4 / 230VAC pod pełnym obciążeniem					
Efficiency (typ.)	88%			89%		
AC current (typ.)	0.7A / 230VAC					
Inrush current (max.)	29,5A / 230VAC; T _{WIDTH} (50% peak) = 670μs					
Max. No. Of PSU on Circuit Breaker	B10	B16	C10	C16	D10	D16
	8	13	8	13	17	27
No Load Power Consumption (max.)	< 0.5W					

DIN60W series

60W Din Rail Power Supply



PROTECTIONS

Over Current	Range: 120 ÷ 200%	
	Type: hiccup mode. Recovers automatically after fault condition is removed.	
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.	
Over Voltage	18-23V	24-48V
	Type: hiccup mode. Recovers automatically after fault condition is removed.	
Over Temperature	Range: NTC detect	
	Type: shut down output voltage. Auto-recovery.	

WORKING ENVIRONMENT

Working Temperature	-20°C ÷ +50°C
Working Humidity	45 ÷ 85% RH non-condensing
Storage Temperature and Humidity	-30°C ÷ +70°C, 10 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS

Safety Standards	Compliance to EN62368-1
Withstand Voltage	IN/OUT: 3.75kVAC
EMC Emission	Compliance to EN55032
EMC Immunity	Compliance to EN55035
Harmonic Current	Compliance to EN 61000-3-3; EN 61000-3-2

OTHERS

Dimensions	78 x 93 x 56mm (L x W x H)
Weight and Packing	0.240kg; 50pcs./box; weight box and dimensions: 13kg; 45.6 x 22 x 34 cm

EAN Code



5 902135 137949



5 902135 137956


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.
6. By built-in potentiometer.

DIN60W series

60W Din Rail Power Supply



MECHANICAL SPECIFICATION

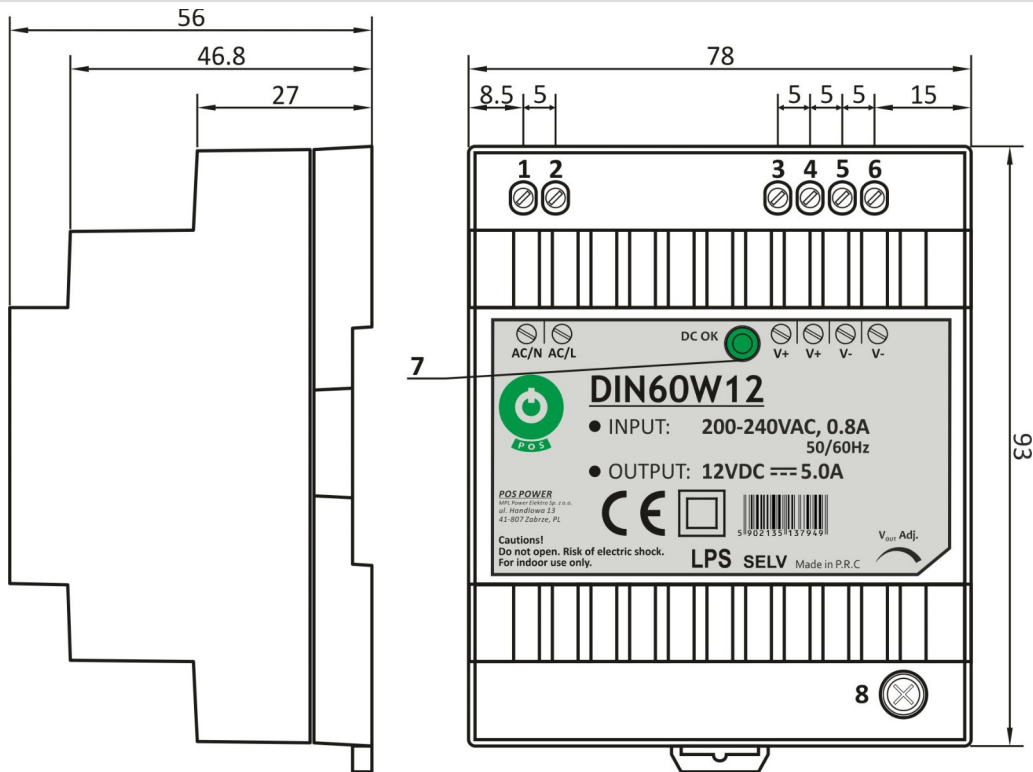

PIN ASSIGNMENT

No.	Assignment	No.	Assignment
1	Input: AC/N	3,4	Output: U _{OUT} +
2	Input: AC/L	5,6	Output: U _{OUT} -
		7	LED indication for power on
		8	U _{OUT} adjustment