


Free standing convector WDF

WDF is a free standing convector which can be used together with WZD (beech board) as a bench. Its structure was designed to hold up to 100 kg. Heat exchanger technology allows hot air to be released through the grid to its surrounding without undesirable release of its heat to the convectors body. **WDF is for the finished floor.**

dimension (in mm)

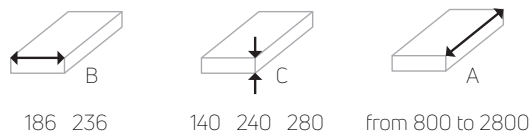

standard colours




*custom colours upon request

material of the casing, legs and holders

Casing is made from **1,3 mm galvanized steel**, legs and holders for the bench are made from **1,5 mm galvanized steel**. Convector can hold up to 100 kg.

material of the heat exchanger

Heat exchanger is made from copper pipes and aluminium lamellas. The diameter of the pipes is 15,9 mm with 0,4 mm of thickness. Endings are with 1/2" connections.

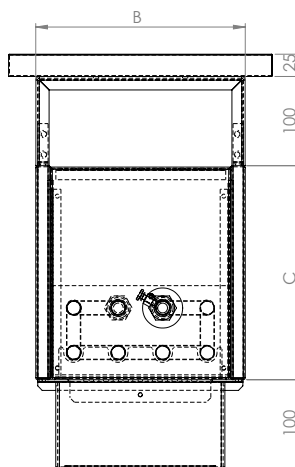

water connection

Right and left connection is possible, needs to be specified. In the standard delivery there is a hole for thermostatic head. If actuator will be used, side with the hole for the thermostatic head could be changed for the side without the hole, needs to be specified.

technical data


From 600 to 1600 mm there are **two legs**, from 1800 to 2900 mm there are **three legs**, max. operating pressure 10 bar, automatic air vent, tested in accordance with **DIN EN 442**.

standard delivery accessories


Standing legs for finished floor with screws and wall plugs, special holders for WZD bench (**WZD bench is not part of the delivery**).

optional accessories

- WZD beech board which is not part of the standard delivery
- WZA leg covers, which can hide watter connection pipes and fixing screws to the floor
- WZB covers, which can hide fixing screws to the floor

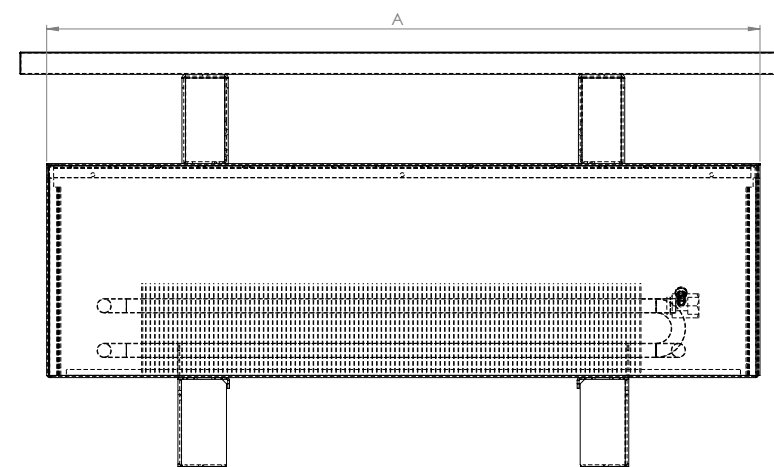

dimensions of optional accessory - beech board WZD

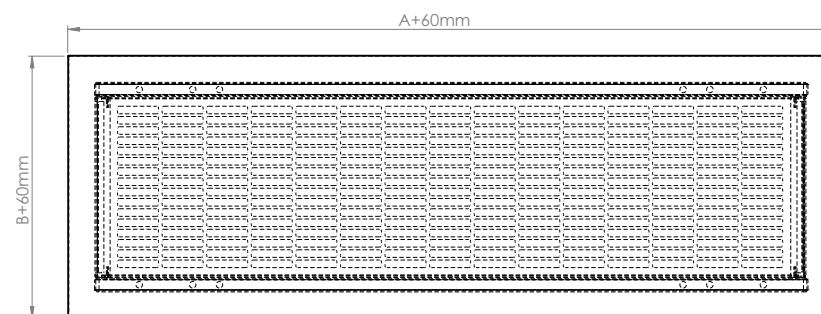

		heat output [W] 75/65/20°C					
width B [mm]		186			236		
height C [mm]		140	240	280	140	240	280
800		739	1005	1086	963	1310	1416
1000		924	1257	1358	1203	1636	1768
1200		1108	1508	1630	1444	1964	2123
1400		1332	1812	1959	1737	2362	2553
1600		1556	2116	2287	2030	2761	2984
length A	1800	1779	2420	2616	2322	3158	3413
	2000	2003	2724	2945	2615	3556	3844
	2200	2227	3029	3274	2908	3955	4275
	2400	2451	3333	3603	3200	4352	4704
	2600	2675	3638	3932	3493	4750	5135
	2800	2912	3953	4272	3780	5162	5580